

## Network Cable Fiber

### LinkIT fiber patch OM3 LC/ST Aqua 0,3m

Duplex | MM | LSZH

Product number: FPD53LPTP-003

## Product Description

Cost-effective fiber cable solution for card transmission. Our OM3 multimode fiber patch cords are 100% tested and certified. Designed for high-speed and older networks such as Gigabit Ethernet and Fiber Channel, they support 10G data speeds of up to 300m and 40 / 100Gb up to 100m.

## Main Specifications

<b>Brand</b>	LinkIT
<b>Color</b>	Aqua
<b>Length (m)</b>	0,3
<b>Category</b>	OM3
<b>Connector type 1</b>	LC
<b>Connector type 2</b>	ST
<b>Polishing contact 1</b>	UPC
<b>Polishing contact 2</b>	UPC
<b>Cable type</b>	Duplex
<b>Number of fibers</b>	2
<b>Wave length (nm)</b>	850/1300nm
<b>Core Diameter (um)</b>	50/125 - Multimode

## Extended Specifications

<b>Jacket material</b>	LSZH
<b>Anti-kink sleeve</b>	Moulded
<b>Optical Return Loss (dB)</b>	≥35dB




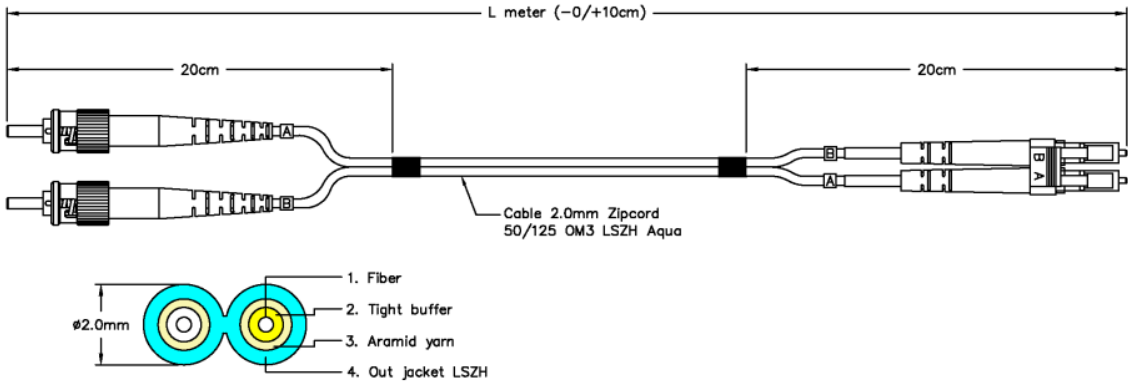
<b>Insertion Loss (dB)</b>	≤0.3dB
<b>Operating Temperature</b>	-40°C ~ +75°C
<b>Storage Temperature</b>	-40°C ~ +75°C
<b>Cable Diameter (mm)</b>	2
<b>Fire properties</b>	IEC-60332-3-24, IEC 60332-1-2, IEC 61034, IEC 60754-1
<b>Halogenfree</b>	✓
<b>Bending radius (mm)</b>	20mm
<b>Tensile loads (N)</b>	150N
<b>Certifications</b>	CE, RoHS

## Single packaging

<b>Unit</b>	PCE
<b>Quantity</b>	1

## Dimensional Sketches

 LinkIT FiberPatch OM3 ST/LC Aqua



— L meter (-0/+10cm)

20cm

20cm

Cable 2.0mm Zipcord  
50/125 OM3 LSZH Aqua

1. Fiber  
2. Tight buffer  
3. Aramid yarn  
4. Out jacket LSZH

ø2.0mm

Specifications			
Connector type:	ST-LC	Insertion loss:	≤0.3dB
Fiber mode:	OM3 50/125	Return loss:	≥35dB
Fiber grade:	G.651.1	Wave length:	850/1300nm
Polish type:	PC	Optimized Data rate:	1Gb/s over 1000m / 10Gb/s over 300m
Cable jacket:	LSZH	Durability:	500 matings
Color:	Aqua	Operating/storage temp:	-40°C ~ +75°C
Cable diameter:	2mm	Fire properties:	Fire retardant and halogen-free IEC 60332-3-24, IEC 60332-1-2, IEC 61034, IEC 60754-1
Minimum bend radius:	20mm	IEC standards:	All CENELEC standards required
Tensile loads:	150N		

