

## Network Cable Fiber

### LinkIT fiberpatch OS2 LC-APC/LC-APC 2m

Simplex SM | LSZH | G657A2 | Yellow

Product number: LI-FPOS2LALAS-Y002

## Product Description

## Main Specifications

<b>Brand</b>	LinkIT
<b>Color</b>	Yellow
<b>Length (m)</b>	2
<b>Category</b>	OS2
<b>Connector type 1</b>	LC
<b>Connector type 2</b>	LC
<b>Polishing contact 1</b>	APC
<b>Polishing contact 2</b>	APC
<b>Cable type</b>	Simplex
<b>Number of fibers</b>	1
<b>Wave length (nm)</b>	1310/1550nm


## Extended Specifications


<b>Jacket material</b>	LSZH
<b>Optical Return Loss (dB)</b>	>65dB
<b>Insertion Loss (dB)</b>	<0,3dB
<b>Operating Temperature</b>	--40°C - +75°C
<b>Storage Temperature</b>	--40°C - +75°C
<b>Cable Diameter (mm)</b>	2mm
<b>Fire properties</b>	IEC-60332-3-24, IEC 60332-1-2, IEC 61034, IEC 60754-1



Halogenfree	✓
Fire retardant version	✓
Bending radius (mm)	20mm
Tensile loads (N)	150N
Certifications	CE, REACH

## Dimensional Sketches

 LinkIT FiberPatch SM G657A2 LC/APC-LC/APC Yellow

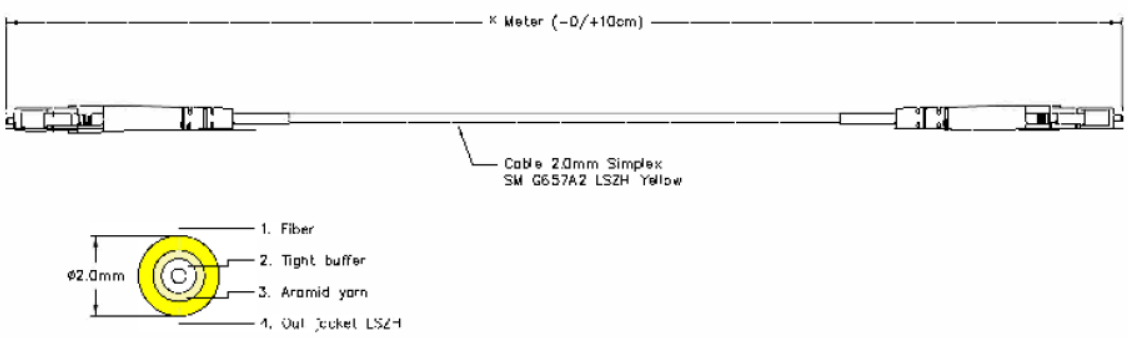

Cable 2.0mm Simplex  
SM G657A2 LSZH Yellow

Specifications			
Connector type:	LC-LC	Insertion loss:	≤0.3dB
Fiber mode:	SM G657A2	Return loss:	≥65dB
Fiber grade:	G657A2 and G652D	Wave length:	1310/1550nm
Polish type:	APC	Optimized Data rate:	xxx
Cable jacket:	LSZH	Durability:	500 matings
Color:	Yellow	Operating/storage temp:	-40°C ~ +75°C
Cable diameter:	2mm	Fire properties:	Fire retardant and halogen-free IEC 60332-3-24, IEC 60332-1-2, IEC 61034, IEC 60754-1
Minimum bend radius:	20mm	IEC standards:	All CENELEC standards required
Tensile loads:	150N		

