


Installation Cable Copper

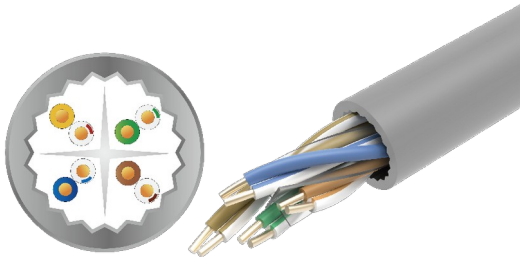

LinkIT Cat.6 U/UTP LSZH white 305m

Installation cable, AWG 23/1, 250Mhz, Reel in box

Product number: LT-UTP-C6I-WH-305

EI-number: 6919450

Product Description

LinkIT Cat. 6 installation cables have a solid copper core at AWG23 and are equipped with a LSZH (Low Smoke Zero Halogen) sheath.

CPR classification: Dca s2, d2, a1, and it complies with the following standards for fire resistance and limited smoke emission: EN 50575:2014, EN 60332-1-2:2004, EN 50399:2011, EN 60754-2:2014, and EN 13501-6:2014.

LinkIT Cat. 6 cables are PoE+ and PoE++ compatible. The cables feature length indicator, and are available in 350m, 500m, and 1000m lengths. These are available in unshielded (U/UTP), foil shielded (F/FTP), and braided/foil shielded (S/FTP) versions.

Main Specifications

Brand	LinkIT
Color	White
Length (m)	305
Category	Cat.6
Conductor material	Copper
Cable shielding	U/UTP - unshielded/unshielded twisted pairs
Cable type	U/UTP

Extended Specifications

AWG wire size	23
Transmission speed	1000Mbps



Frequency (Mhz)	250
NVP value	69%
Jacket material	LSZH
Inner cape	LSZH
Conductor diameter	0,55mm
Outer Cape diameter	5,9mm
Cable fire class	Dca s2, d2, a1
Halogenfree	✓
Core color 1	Blue, White
Core color 2	Orange, White
Core color 3	White, Green
Core Color 4	Brown, White
EAN	7072662004835
Certifications	RoHS, CE, REACH
Segregation Class	C

Single packaging

GTIN f-pak	7072262002330
Unit	DRUM
Quantity	1
Height (cm)	34
Width (cm)	27
Length(cm)	33
Weight (kg)	12,7
Gross Weight (kg)	13,7

