


## Network Cable Fiber

### LinkIT Fiberpatch reinforced OM3 LC/LC 3 m

Braided steel jacket duplex LSZH aqua color

Product number: ARMOM3LL-030M

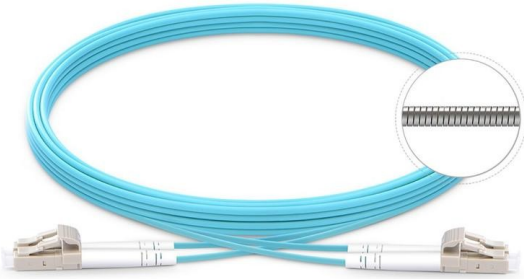

## Product Description

Cost-effective fiber cable solution for card transmission. Our OM3 multimode fiber patch cords are 100% tested and certified. Designed for high-speed and older networks such as Gigabit Ethernet and Fiber Channel, they support 10G data speeds of up to 300m and 40 / 100Gb up to 100m.

## Main Specifications

|                            |        |
|----------------------------|--------|
| <b>Brand</b>               | LinkIT |
| <b>Color</b>               | Aqua   |
| <b>Length (m)</b>          | 3      |
| <b>Category</b>            | OM3    |
| <b>Connector type 1</b>    | LC     |
| <b>Connector type 2</b>    | LC     |
| <b>Polishing contact 1</b> | UPC    |
| <b>Polishing contact 2</b> | UPC    |
| <b>Cable type</b>          | Duplex |
| <b>Number of fibers</b>    | 2      |
| <b>Core Diameter (um)</b>  | 50/125 |



## Extended Specifications

|                                 |   |
|---------------------------------|---|
| <b>Transmission speed</b>       | 10Gbps  |
| <b>Jacket material</b>          | LSZH  |
| <b>Anti-kink sleeve</b>         | Moulded   |
| <b>Optical Return Loss (dB)</b> | <= 0.3 dB   |
| <b>Insertion Loss (dB)</b>      | <= 0.25 dB  |
| <b>Operating Temperature</b>    | -20°C to +70°C  |
| <b>Storage Temperature</b>      | -20°C to +70°C  |
| <b>Cable Diameter (mm)</b>      | 3   |
| <b>Fire properties</b>          | IEC-60332-3-24, IEC 60332-1-2, IEC 61034, IEC 60754-1 |
| <b>Halogenfree</b>              | ✓   |
| <b>Certifications</b>           | CE, RoHS  |

## Single packaging

|                 |     |
|-----------------|-----|
| <b>Unit</b>     | PCE |
| <b>Quantity</b> | 1   |

