





MFO Ferriale - Ferrial | E3Z11



Product number: LI-MPOOM4BFF-12C-002



## **Product Description**

The LinkIT MPO-B OM4 12c is designed for high-performance data transmission, featuring 12 fibers (12 cores) in the OM4 category with a core diameter of  $50/125 \, \mu m$ . The cable is optimized for high-speed data communication, including 40G and 100G applications, offering low attenuation over long distances.

With a temperature range of -20°C to +70°C, the cable is built to withstand demanding environments while maintaining reliability. Additionally, it complies with CE, REACH, and RoHS standards, ensuring adherence to European safety and environmental regulations.



## **Main** Specifications

Brand	LinkIT
Color	Magenta
Length (m)	2
Category	MTP/MPO
Connector type 1	MPO-Female B
Connector type 2	MPO-Female B
Number of fibers	12
Core Diameter (um)	50/125


Visit our website:



# **Extended** Specifications

Optical Return Loss (dB)	≥20
Insertion Loss (dB)	≤0.75
Operating Temperature	-20°C ~ +70°C
Storage Temperature	-20°C ~ +70°C
Cable Diameter (mm)	3
Halogenfree	V
Bending radius (mm)	Dynamic; 30D, Static; 15D
EAN	7072262019116
Certifications	CE, REACH, RoHS

## **Dimensional** Sketches

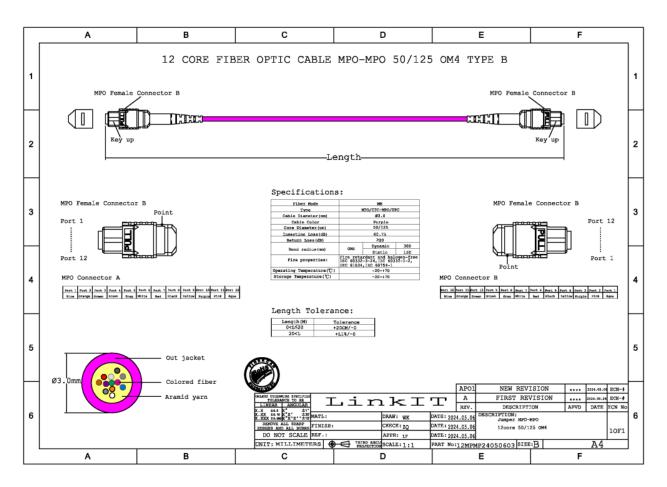



T +47 22 90 37 00

M linkit@linkit.eu

W www.linkit.eu