


## Fibre cassette

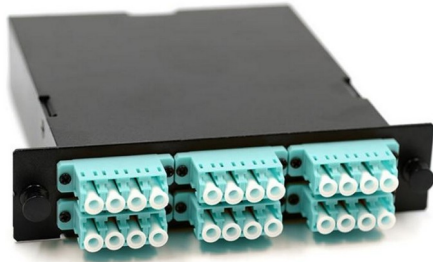

### LinkIT MTP x 3 to 24 x LC OM4 Cassette 10G/25G

3 x USConec connectors 0,35dB

Product number: MTPX3-LCX24OM4

## Product Description

LinkIT MTP x 3 to 24 x LC OM4 cassette 10G / 25G. The cassette contains 3 USConec connectors, 3 MTP adapters and has 24 outputs in contact type LC. Insertion loose rear connector: Elite UPC≤0.35dB. Multimode: ≥20dB.

## Main Specifications

<b>Brand</b>	LinkIT
<b>Color</b>	Black
<b>Measurements (WxHxD)</b>	121,2 x 77 x 130,87
<b>Material</b>	Steel
<b>Fibreclass</b>	Multimode OM4 50/135um
<b>Front Connector Color</b>	LC/SC Multimode OM3/OM4: Aqua
<b>Rear Connector Color</b>	MTP Multimode OM3/OM4: Aqua
<b>Front Adapter Color</b>	LC/SC Multimode OM3/OM4: Aqua
<b>Number of outputs</b>	24
<b>Type of inputs</b>	LC adapter

## Extended Specifications

<b>Operating Temperature</b>	-10°C-60°C
<b>Input</b>	3 x MTP adapter USConec
<b>Cable</b>	3 x 8C MTP Male-LC 0.9mm 25cm
<b>Front Connector</b>	Multimode LC/SC Duplex with UPC Polish
<b>Insertion Loss Front</b>	Multimode: UPC≤0.25dB



<b>Connector</b>	
<b>Return Loss Front Connector</b>	Multimode: UPC $\geq$ 30dB
<b>Rear Connector</b>	Multimode US Conec MTP Male Ferrules and UPC
<b>Insertion Loss Rear Connector</b>	Multimode: Standard UPC $\leq$ 0.6dB Elite UPC $\leq$ 0.35dB
<b>Return Loss Rear Connector</b>	Multimode: $\geq$ 20dB
<b>Front Adapter</b>	LC Duplex Adapter without flange
<b>Rear Adapter</b>	3 pcs MTP Adapter Standard
<b>Certifications</b>	CE, RoHS

## Single packaging

<b>Unit</b>	BOX
<b>Quantity</b>	1
<b>Height (cm)</b>	7,7
<b>Width (cm)</b>	12,1
<b>Length(cm)</b>	13
<b>Weight (kg)</b>	0
<b>Gross Weight (kg)</b>	0

