



## Power Cable

### LinkIT Power CEE 7/7 to C5 Black 7 m Straight

PVC 3 x 0,75 mm<sup>2</sup>

Product number: NYESCC5-7M

EI-number: 6955999

## Product Description

"Mickey Mouse" cable with straight Schuko - C5. PVC 3 x 0,75 mm<sup>2</sup>. . Certifications: RoHs, CE, VDE

## Main Specifications

<b>Brand</b>	LinkIT
<b>Color</b>	Black
<b>Length (m)</b>	7
<b>Connector type 1</b>	CEE 7/7
<b>Connector type 2</b>	C5 (F)
<b>Conductor material</b>	3 Wire
<b>Number of conductors</b>	3

## Extended Specifications

<b>NVP value</b>	69%
<b>Jacket material</b>	PVC
<b>Angle contact 1</b>	Straight
<b>Angle Contact 2</b>	Straight
<b>Voltage</b>	AC 110-250V
<b>Amperage</b>	2.5A
<b>Conductor colour code</b>	Brown, Blue, Green, Yellow
<b>Gauge</b>	3X0.75MM2
<b>Operating Temperature</b>	-20 - 70 °C
<b>Halogenfree</b>	X
<b>With Earthing</b>	✓

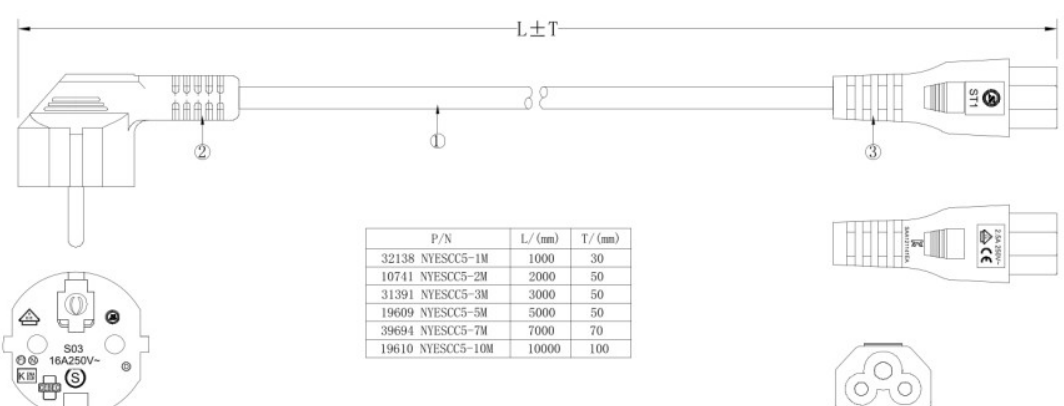


<b>EAN</b>	7090033567833
<b>Certifications</b>	VDE, CE, RoHS, REACH

## Single packaging

<b>GTIN f-pak</b>	7090033567833
<b>Unit</b>	PCE
<b>Quantity</b>	1
<b>Height (cm)</b>	32
<b>Width (cm)</b>	13
<b>Length(cm)</b>	7
<b>Weight (kg)</b>	0,33
<b>Gross Weight (kg)</b>	0,35

## Dimensional Sketches

RevNo.	Revision note	Date	Signature	Checked																																
																																				
<table border="1" style="margin: auto;"> <thead> <tr> <th>P/N</th> <th>L/ (mm)</th> <th>T/ (mm)</th> </tr> </thead> <tbody> <tr> <td>32138 NYESCC5-1M</td> <td>1000</td> <td>30</td> </tr> <tr> <td>10741 NYESCC5-2M</td> <td>2000</td> <td>50</td> </tr> <tr> <td>31391 NYESCC5-3M</td> <td>3000</td> <td>50</td> </tr> <tr> <td>19609 NYESCC5-5M</td> <td>5000</td> <td>50</td> </tr> <tr> <td>39694 NYESCC5-7M</td> <td>7000</td> <td>70</td> </tr> <tr> <td>19610 NYESCC5-10M</td> <td>10000</td> <td>100</td> </tr> </tbody> </table>					P/N	L/ (mm)	T/ (mm)	32138 NYESCC5-1M	1000	30	10741 NYESCC5-2M	2000	50	31391 NYESCC5-3M	3000	50	19609 NYESCC5-5M	5000	50	39694 NYESCC5-7M	7000	70	19610 NYESCC5-10M	10000	100											
P/N	L/ (mm)	T/ (mm)																																		
32138 NYESCC5-1M	1000	30																																		
10741 NYESCC5-2M	2000	50																																		
31391 NYESCC5-3M	3000	50																																		
19609 NYESCC5-5M	5000	50																																		
39694 NYESCC5-7M	7000	70																																		
19610 NYESCC5-10M	10000	100																																		
<p><b>NOTES:</b></p> <ol style="list-style-type: none"> <li>1. Open/Short/Intermittence:100%</li> <li>2. Rated voltage:250V</li> <li>3. Rated current:2.5A</li> <li>4. Max. Working Temperature:70°C</li> <li>5. IEC/TC20 Class:IP22</li> <li>6. RoHS &amp; REACH Compliant</li> </ol>																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Item#</th> <th>Quantity</th> <th>Title/Name, designation, material, dimension etc</th> <th>Article NO./Reference</th> </tr> </thead> <tbody> <tr> <td>①</td> <td>1</td> <td>PLUG ST1:C5 PVC/BLACK</td> <td>PCS</td> </tr> <tr> <td>②</td> <td>1</td> <td>PLUG S03:Angled Schuko PVC/BLACK</td> <td>PCS</td> </tr> <tr> <td>③</td> <td>L</td> <td>CABLE H05VV-F 3*0.75mm<sup>2</sup> PVC/BLACK JACKET OD:6.5±0.2mm MARKING:&lt;VDE&gt; H05VV-F 3G0.75mm<sup>2</sup> NINGBO OUSHENG</td> <td>MM</td> </tr> </tbody> </table>					Item#	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference	①	1	PLUG ST1:C5 PVC/BLACK	PCS	②	1	PLUG S03:Angled Schuko PVC/BLACK	PCS	③	L	CABLE H05VV-F 3*0.75mm <sup>2</sup> PVC/BLACK JACKET OD:6.5±0.2mm MARKING:<VDE> H05VV-F 3G0.75mm <sup>2</sup> NINGBO OUSHENG	MM																
Item#	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference																																	
①	1	PLUG ST1:C5 PVC/BLACK	PCS																																	
②	1	PLUG S03:Angled Schuko PVC/BLACK	PCS																																	
③	L	CABLE H05VV-F 3*0.75mm <sup>2</sup> PVC/BLACK JACKET OD:6.5±0.2mm MARKING:<VDE> H05VV-F 3G0.75mm <sup>2</sup> NINGBO OUSHENG	MM																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>NO.</th> <th>MATERIAL</th> <th>DESCRIPTION</th> <th>QTY.</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td>①</td> <td>PLUG</td> <td>ST1:C5 PVC/BLACK</td> <td>1</td> <td>PCS</td> </tr> <tr> <td>②</td> <td>PLUG</td> <td>S03:Angled Schuko PVC/BLACK</td> <td>1</td> <td>PCS</td> </tr> <tr> <td>③</td> <td>CABLE</td> <td>H05VV-F 3*0.75mm<sup>2</sup> PVC/BLACK JACKET OD:6.5±0.2mm MARKING:&lt;VDE&gt; H05VV-F 3G0.75mm<sup>2</sup> NINGBO OUSHENG</td> <td>L</td> <td>MM</td> </tr> </tbody> </table>		NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	①	PLUG	ST1:C5 PVC/BLACK	1	PCS	②	PLUG	S03:Angled Schuko PVC/BLACK	1	PCS	③	CABLE	H05VV-F 3*0.75mm <sup>2</sup> PVC/BLACK JACKET OD:6.5±0.2mm MARKING:<VDE> H05VV-F 3G0.75mm <sup>2</sup> NINGBO OUSHENG	L	MM	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Designed by FLY</td> <td>Checked by HELEN</td> <td>Approved by - date 2023.02.22</td> <td>File name</td> <td>Date 2023.02.22</td> <td>Scale FREE</td> </tr> <tr> <td colspan="2" style="text-align: center;"><b>MAINNING</b></td> <td colspan="2">Angled Schuko TO C5 3*0.75mm<sup>2</sup></td> <td>Edition 1</td> <td>Sheet 1/1</td> </tr> </table>			Designed by FLY	Checked by HELEN	Approved by - date 2023.02.22	File name	Date 2023.02.22	Scale FREE	<b>MAINNING</b>		Angled Schuko TO C5 3*0.75mm <sup>2</sup>		Edition 1	Sheet 1/1
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT																																
①	PLUG	ST1:C5 PVC/BLACK	1	PCS																																
②	PLUG	S03:Angled Schuko PVC/BLACK	1	PCS																																
③	CABLE	H05VV-F 3*0.75mm <sup>2</sup> PVC/BLACK JACKET OD:6.5±0.2mm MARKING:<VDE> H05VV-F 3G0.75mm <sup>2</sup> NINGBO OUSHENG	L	MM																																
Designed by FLY	Checked by HELEN	Approved by - date 2023.02.22	File name	Date 2023.02.22	Scale FREE																															
<b>MAINNING</b>		Angled Schuko TO C5 3*0.75mm <sup>2</sup>		Edition 1	Sheet 1/1																															

